

WM3-L Wrapper - High Speed



Wrapping Machine


Daky Pack's WM-Series Wrapping Machines are part of the primary section of the production, specifically designed for keeping product integrity and run ed to synchroniz the press.

Production speed: approx. 200 to 350 portion/min.

Paper centering system can be equipped on Daky Pack's WM - Wrappers.

All our machines are provided with:

- Electrical panel in accordance with in force regulations.
- Product Presence control system.
- · Automatic oil lubrication of the mechanical equipment inside the machine.
- Inverter controlled main machine driver.
- Touchscreen HMI (Human Machine Interface).
- Speed control.
- Production monitoring.
- All part in contact with product are food grade.
- · Safety guards according to CE rules.
- Section for possible assembly of mechanical marking or ink jet or laser printer.

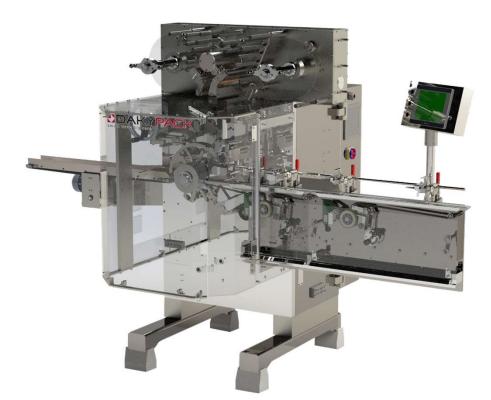






Technical Data		
Production Capacity	200 ÷ 350 portion/min.	
Installed Power (Kw, V, Hz)	4Kw - 400V - 50/60Hz	
Compressed Air Consumption	20 Nl/min (Min. Op. Pressure 6 bar)	
Vacuum Pump Flow	•	
Weight	1500 kg approx.	

-	D •	
ВОХ	Dimer	nsions

A (min.÷max.)	30 mm ÷ 50 mm
B (min.÷ max.)	30 mm ÷ 70 mm
C (min.÷ max.)	18 mm ÷ 29 mm
Weight	116 g ÷ 100 g
Wrapping Style	Side Fold



Sizes out of range can be handled after been evaluated from technical office.

